ONE PRODUCT FOR MANY APPLICATIONS

Protective system BR⁺

MODULAR SYSTEM FOR FLUSH DOORS WITH KNUCKLE HINGES

timber fire door	timber - aluminium door	aluminium door	steel door	multifunction steel door

SAFE AND FINE ADJUSTMENT TO AVOID SHEARING POINTS

/ slotted holes for secure mounting and 2D fastening element for tight fit

/ profiles infinitely variable with patented height adjustment - no relining necessary!

/ profiles demountable for maintenance purposes

ATTRACTIVE DESIGN WITH MORE SAFETY

/ tamper-proof fastening due to concealed screws

/ end caps on the profile prevent butt edges due to a radius > 2 mm

/ compliance with max. 8 mm opening gap acc. to EN 16005 by fine adjustment

SIMPLE, QUICK AND SAFE MOUNTING, WITHOUT COMPLEX RELINING

/ align the profiles in the alignment of the belt without marking

/ press the profiles on between the hinges without tools using adhesive pads

/ fix with suitable self-drilling screws without predrilling and countersinking

Align. Press on. Fix. Done!

athmer

New: the **+** in adjustability and mounting safety

Old vs. new - the advantages of installing the BR⁺ at a glance.

/ installation previously with relining

/ cost-intensive installation

/ assembly new: matching solution with the BR⁺

/ system quickly adjustable

ADDITIONAL INFORMATION

/ Can be retrofitted to all flush doors with knuckle hinges

  — whether manual or automated as well as on fire & smoke protection doors in coordination with the manufacturer - athmer provides support

/ high quality aluminum profiles, maintenance free

/ profiles for self-cutting with suitable fastening material

/ set delivery lengths for door leaf heights: 2,100 mm, 2,250 mm and 2,400 mm

  — standard-compliant protection for nursery and automatic doors

/ special lengths without adapter on request

/ **NEW:** order made to measure according to measurement sheet and save even more time during installation

/ Standard color: silver anodized C-0, C-31, RAL 9016, individual colors available
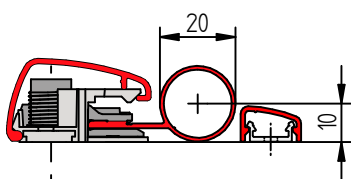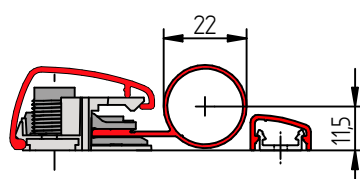
/ more information: www.athmer.com/br-plus

VARIANTS

15

8,5

BR-15⁺

18

9,5

BR-18⁺

20

10

BR-20⁺

22

11,5

BR-22⁺

HEIGHT ADJUSTMENT

18

9,5

max. height adjustment 5 mm

18

14,5

measuring sheet

installation video

athmer